



La solution assistance

ERROR CODE



La solution assistance



Français

Page de

2

à

2



English

Page

3

to

3



Español

página

4

a

4



Português

página

5

a

5



Polski

strona

6

do

6



Magyar

oldal

7

és

7



Română

pagina

8

și

8



Deutsch

Seite von

9

und


9

La solution assistance

CODE ERREUR	Description
Clignotement éclairage	Défaut sonde de température

Valeurs sonde de température							
T()	R(k Ω)	T()	R(k Ω)	T()	R(k Ω)	T()	R(k Ω)
-30	33.81	-20	18.9	0	6.495	5	5.06
-28	30.01	-18	16.9	1	6.175	6	4.818
-26	26.68	-16	15.12	2	5.873	8	4.372
-24	23.76	-10	10.92	3	5.587	10	3.972
-22	21.18	-5	8.392	4	5.315	15	3.141

La solution assistance

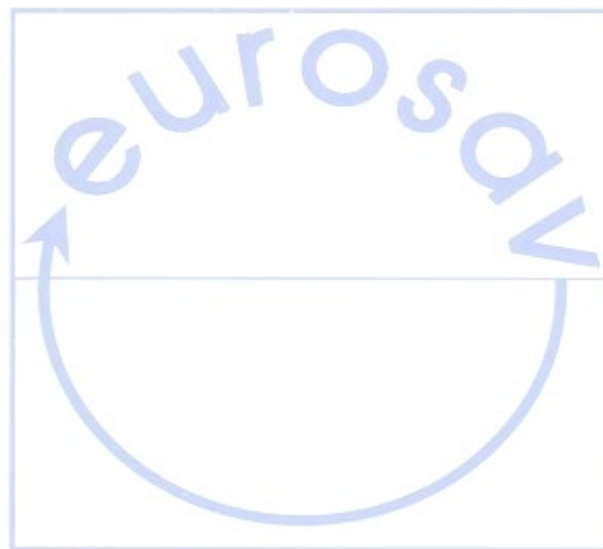


La solution assistance

ERROR CODE	Description
Flashing lighting	Temperature sensor fault

Temperature probe values							
T()	R(k Ω)	T()	R(k Ω)	T()	R(k Ω)	T()	R(k Ω)
-30	33.81	-20	18.9	0	6,495	5	5.06
-28	30.01	-18	16.9	1	6.175	6	4,818
-26	26.68	-16	15.12	2	5,873	8	4.372
-24	23.76	-10	10.92	3	5,587	10	3,972
-22	21.18	-5	8,392	4	5.315	15	3.141

La solution assistance

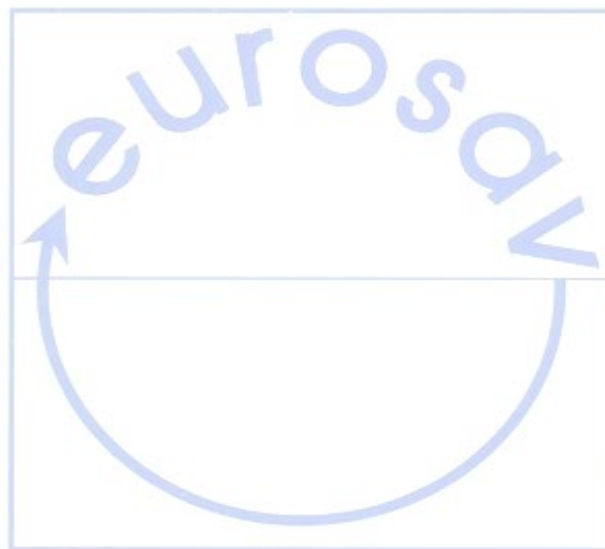


La solution assistance

CÓDIGO DE ERROR	Descripción
iluminación intermitente	Fallo del sensor de temperatura

Valores de la sonda de temperatura							
T()	R(kΩ)	T()	R(kΩ)	T()	R(kΩ)	T()	R(kΩ)
-30	33,81	-20	18.9	0	6.495	5	5.06
-28	30.01	-18	16.9	1	6.175	6	4.818
-26	26,68	-16	15.12	2	5.873	8	4.372
-24	23,76	-10	10.92	3	5.587	10	3.972
-22	21.18	-5	8.392	4	5.315	15	3.141

La solution assistance

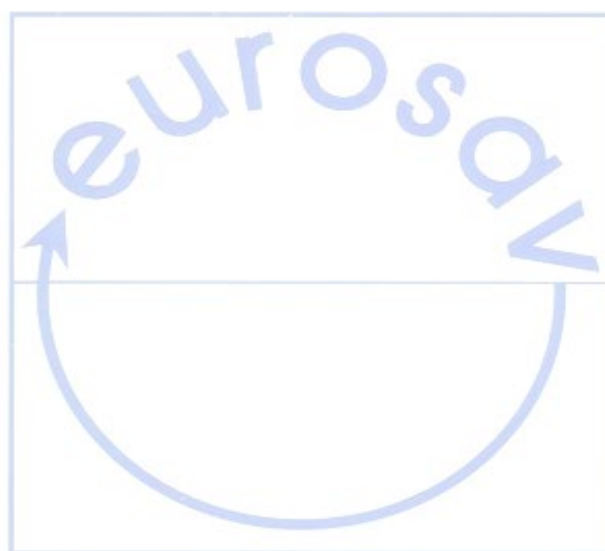


La solution assistance

ERRO DE CÓDIGO	Descrição
Iluminação intermitente	Falha no sensor de temperatura

Valores da sonda de temperatura							
T()	R(k Ω)	T()	R(k Ω)	T()	R(k Ω)	T()	R(k Ω)
-30	33,81	-20	18,9	0	6.495	5	5.06
-28	30.01	-18	16,9	1	6.175	6	4.818
-26	26,68	-16	15.12	2	5.873	8	4.372
-24	23,76	-10	10,92	3	5.587	10	3.972
-22	21.18	-5	8.392	4	5.315	15	3.141

La solution assistance

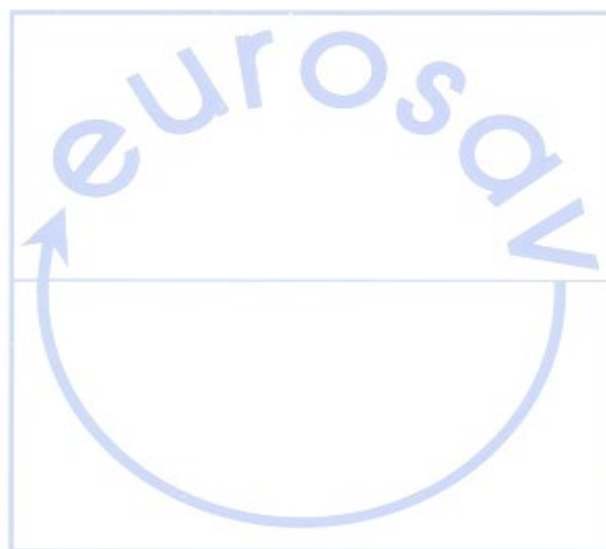


La solution assistance

KOD BŁĘDU	Opis
Migające oświetlenie	Błąd czujnika temperatury

Wartości czujnika temperatury							
T()	R(kΩ)	T()	R(kΩ)	T()	R(kΩ)	T()	R(kΩ)
-30	33,81	-20	18.9	0	6495	5	5.06
-28	30.01	-18	16.9	1	6.175	6	4818
-26	26,68	-16	15.12	2	5873	8	4.372
-24	23,76	-10	10,92	3	5587	10	3972
-22	21.18	-5	8392	4	5.315	15	3.141

La solution assistance

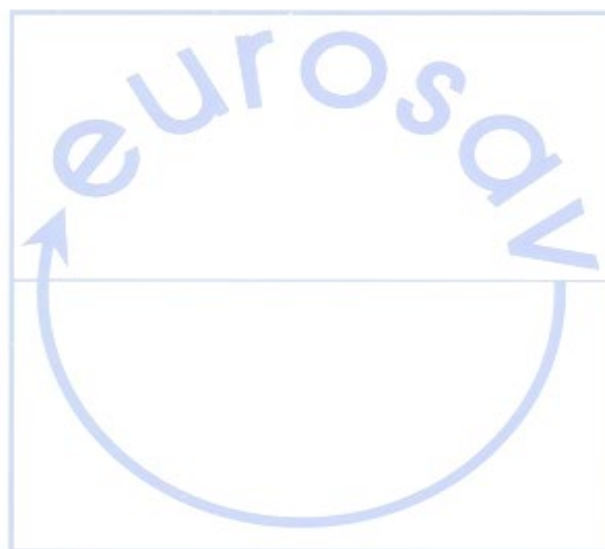


La solution assistance

HIBAKÓD	Leírás
Villogó világítás	Hőmérséklet érzékelő hiba

Hőmérséklet-szonda értékek							
T()	R(kΩ)	T()	R(kΩ)	T()	R(kΩ)	T()	R(kΩ)
-30	33.81	-20	18.9	0	6,495	5	5.06
-28	30.01	-18	16.9	1	6.175	6	4,818
-26	26.68	-16	15.12	2	5,873	8	4.372
-24	23.76	-10	10.92	3	5,587	10	3,972
-22	21.18	-5	8,392	4	5.315	15	3.141

La solution assistance

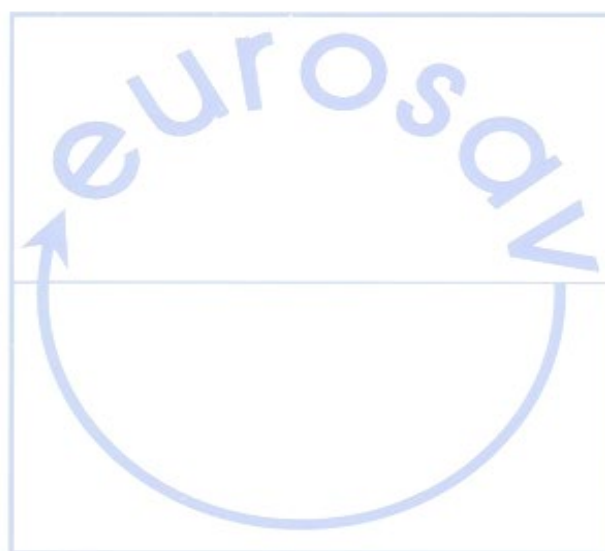


La solution assistance

COD DE EROARE	Descriere
Iluminare intermitentă	Eroare la senzorul de temperatură

Valorile sondei de temperatură							
T()	R(k Ω)	T()	R(k Ω)	T()	R(k Ω)	T()	R(k Ω)
-30	33,81	-20	18.9	0	6.495	5	5.06
-28	30.01	-18	16.9	1	6.175	6	4.818
-26	26.68	-16	15.12	2	5.873	8	4.372
-24	23.76	-10	10.92	3	5.587	10	3.972
-22	21.18	-5	8.392	4	5.315	15	3.141

La solution assistance

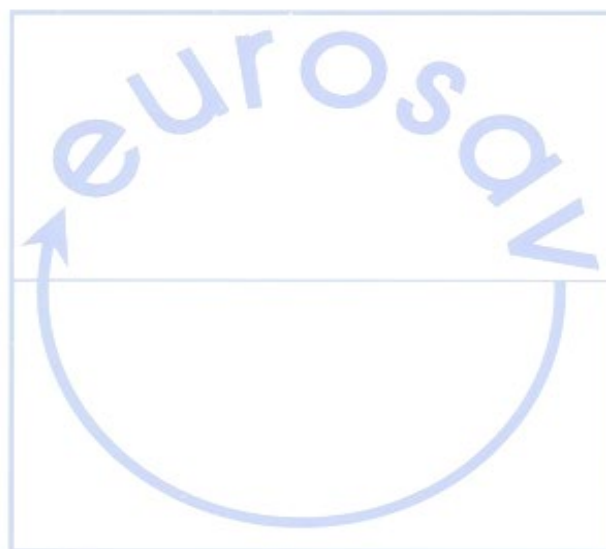

La solution assistance

FEHLERCODE	Beschreibung
Blinkende Beleuchtung	Fehler am Temperatursensor

Temperaturfühlerwerte							
T()	R(kΩ)	T()	R(kΩ)	T()	R(kΩ)	T()	R(kΩ)
-30	33,81	-20	18.9	0	6.495	5	5.06
-28	30.01	-18	16.9	1	6.175	6	4.818
-26	26.68	-16	15.12	2	5.873	8	4.372
-24	23.76	-10	10.92	3	5.587	10	3.972
-22	21.18	-5	8.392	4	5.315	15	3.141

La solution assistance



La solution assistance