



La solution assistance

# ERROR CODE



La solution assistance



**Français**

**Page de**

**2**

**à**

**3**



**English**

**Page**

**4**

**to**

**5**



**Español**

**página**

**6**

**a**

**7**



**Português**

**página**

**8**

**a**

**9**



**Polski**

**strona**

**10**

**do**

**11**



**Magyar**

**oldal**

**12**

**és**

**13**



**Română**

**pagina**

**14**

**și**

**15**



**Deutsch**


**Seite von**


**16**

**und**


**17**

*La solution assistance*

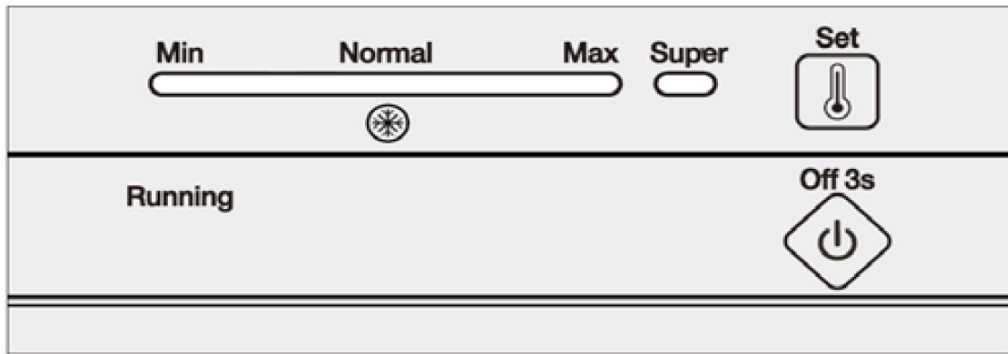


CODE ERREUR (Scintillement)	DESCRIPTION
	Défaut sonde de température

Valeurs sonde de températures							
T( )	R(k $\Omega$ )	T( )	R(k $\Omega$ )	T( )	R(k $\Omega$ )	T( )	R(k $\Omega$ )
-30	33,81	-18	16,90	2	5,87	8	4,37
-28	30,01	-16	15,15	3	5,59	10	3,97
-26	26,68	-10	10,92	4	5,32	15	3,14
-24	23,75	-5	8,39	5	5,06	20	2,50
-22	21,18	0	6,50	6	4,82	25	2,01
-20	18,90	1	6,18	7	4,59	30	1,62

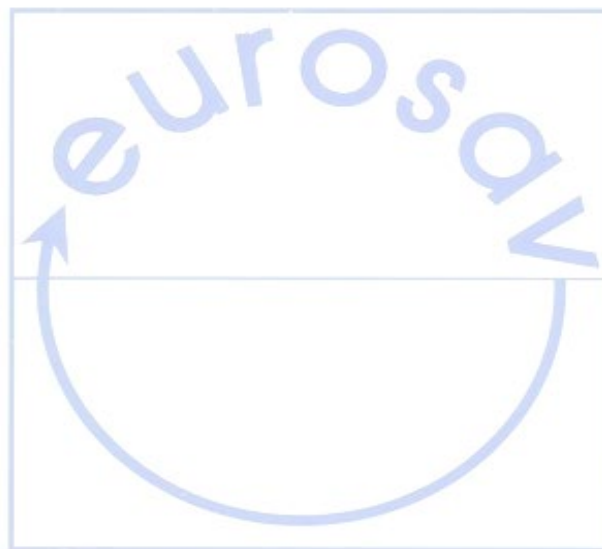



*La solution assistance*

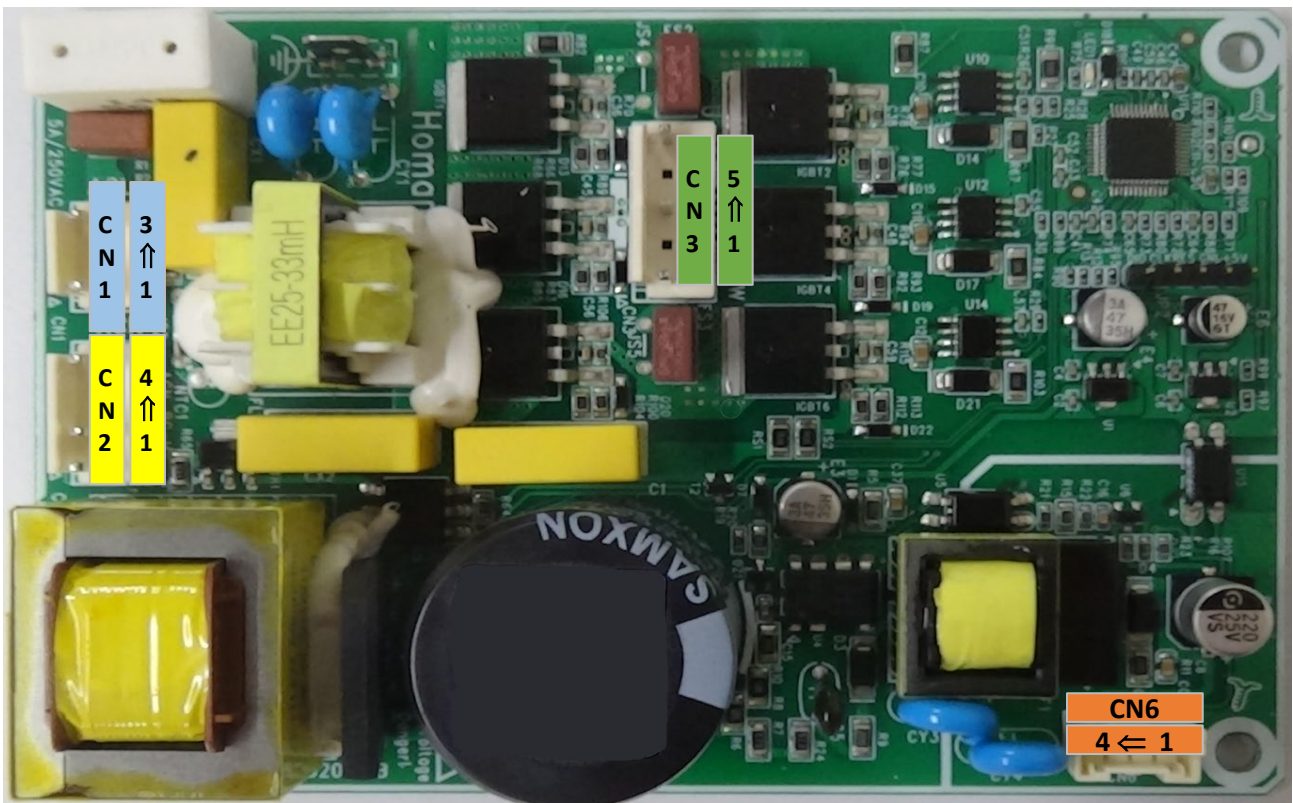


CN1	1	ACN	Neutre	CN3	1	W	Compresseur
	2	-	-		2	-	-
	3	ACL	Phase		3	V	Compresseur
CN2	1	BC-H	-		4	-	-
	2	NTC1	Sonde de température		5	U	Compresseur
	3	-	-	CN6	1	COMU	Afficheur
4	N	Neutre	2		GND	-	
			3		NC	-	
			4		+12V	Afficheur	

*La solution assistance*

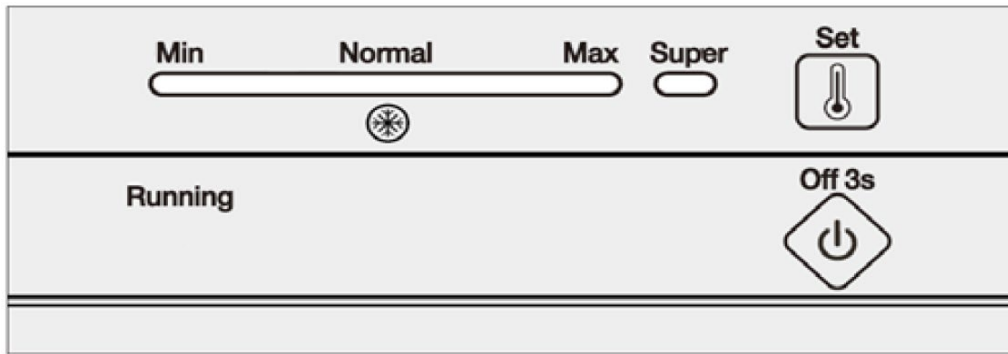


ERROR CODE (Flickering)	DESCRIPTION
	Temperature probe fault

Temperature probe values							
T( )	R(kΩ)	T( )	R(kΩ)	T( )	R(kΩ)	T( )	R(kΩ)
-30	33,81	-18	16,90	2	5,87	8	4,37
-28	30,01	-16	15,15	3	5,59	10	3,97
-26	26,68	-10	10,92	4	5,32	15	3,14
-24	23,75	-5	8,39	5	5,06	20	2,50
-22	21,18	0	6,50	6	4,82	25	2,01
-20	18,90	1	6,18	7	4,59	30	1,62

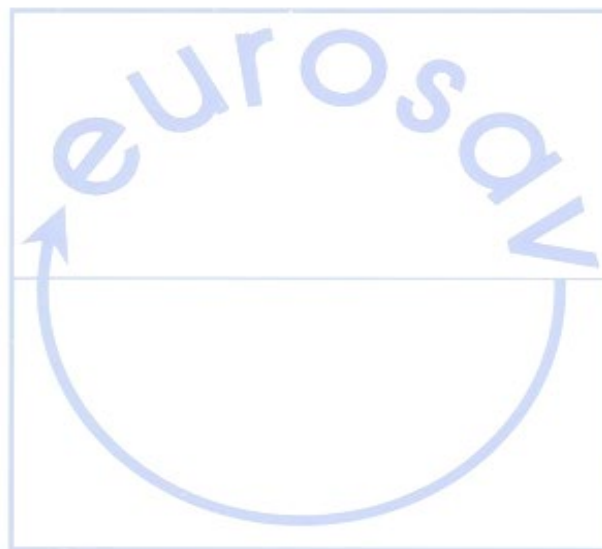


*La solution assistance*



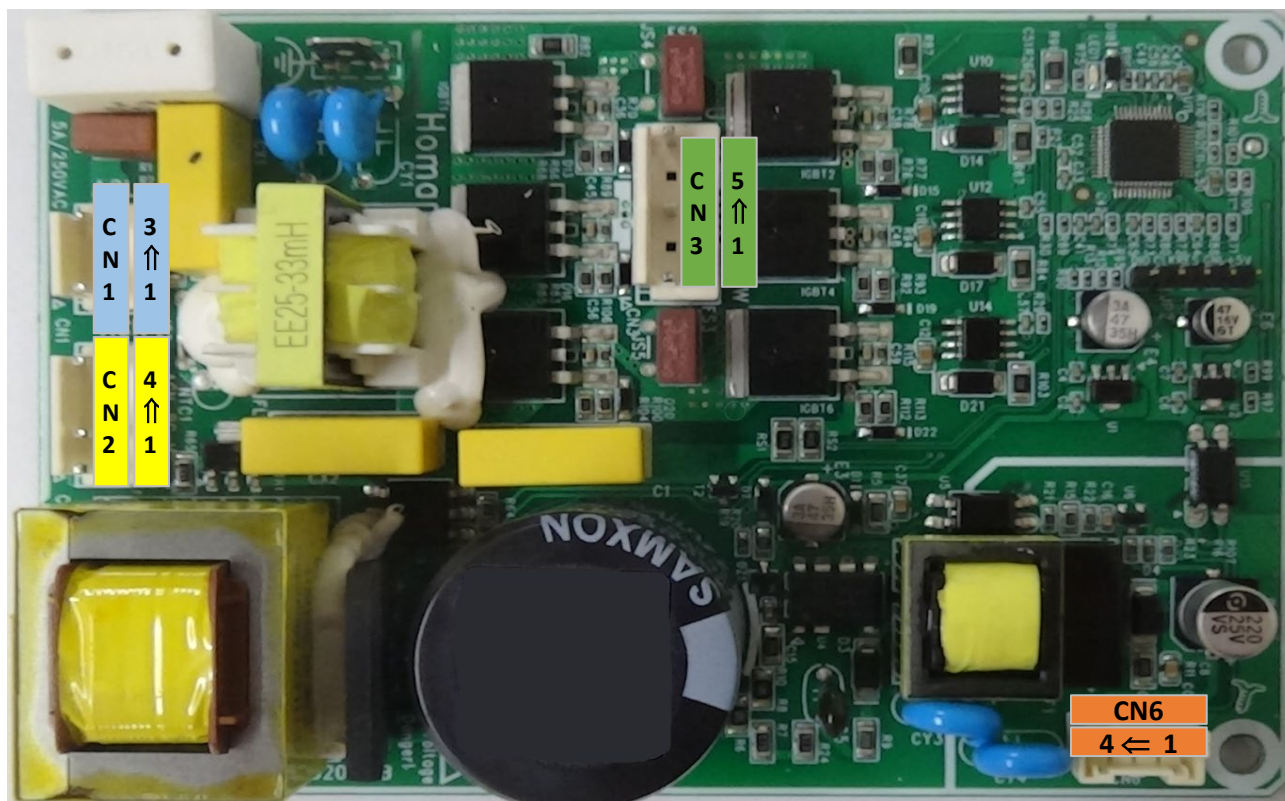


CN1	1	ACN	Neutral	CN3	1	W	Compressor
	2	-	-		2	-	-
	3	ACL	Phase		3	V	Compressor
CN2	1	BC-H	-		4	-	-
	2	NTC1	Temperature probe		5	U	Compressor
	3	-	-	CN6	1	COMU	Display
4	N	Neutral	2		GND	-	
			3		NC	-	
			4		+12V	Display	

*La solution assistance*

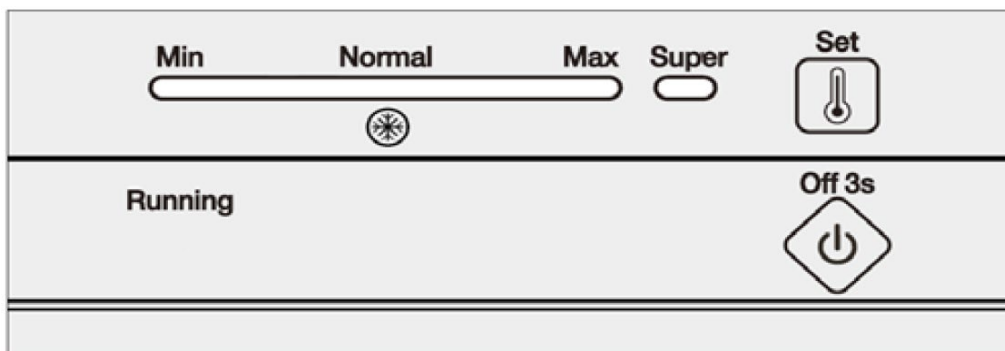


CÓDIGO DE ERROR (parpadeante)	DESCRIPCIÓN
	Fallo del sensor de temperatura

Valores de la sonda de temperatura							
T( )	R(k $\Omega$ )	T( )	R(k $\Omega$ )	T( )	R(k $\Omega$ )	T( )	R(k $\Omega$ )
-30	33,81	-18	16,90	2	5,87	8	4,37
-28	30,01	-16	15,15	3	5,59	10	3,97
-26	26,68	-10	10,92	4	5,32	15	3,14
-24	23,75	-5	8,39	5	5,06	20	2,50
-22	21,18	0	6,50	6	4,82	25	2,01
-20	18,90	1	6,18	7	4,59	30	1,62

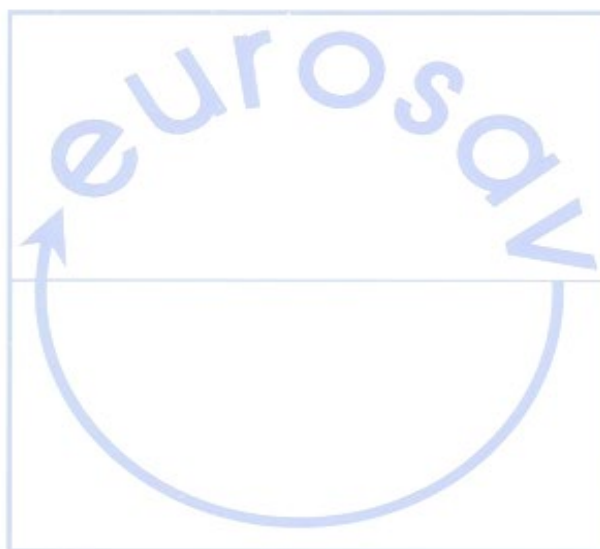


*La solution assistance*

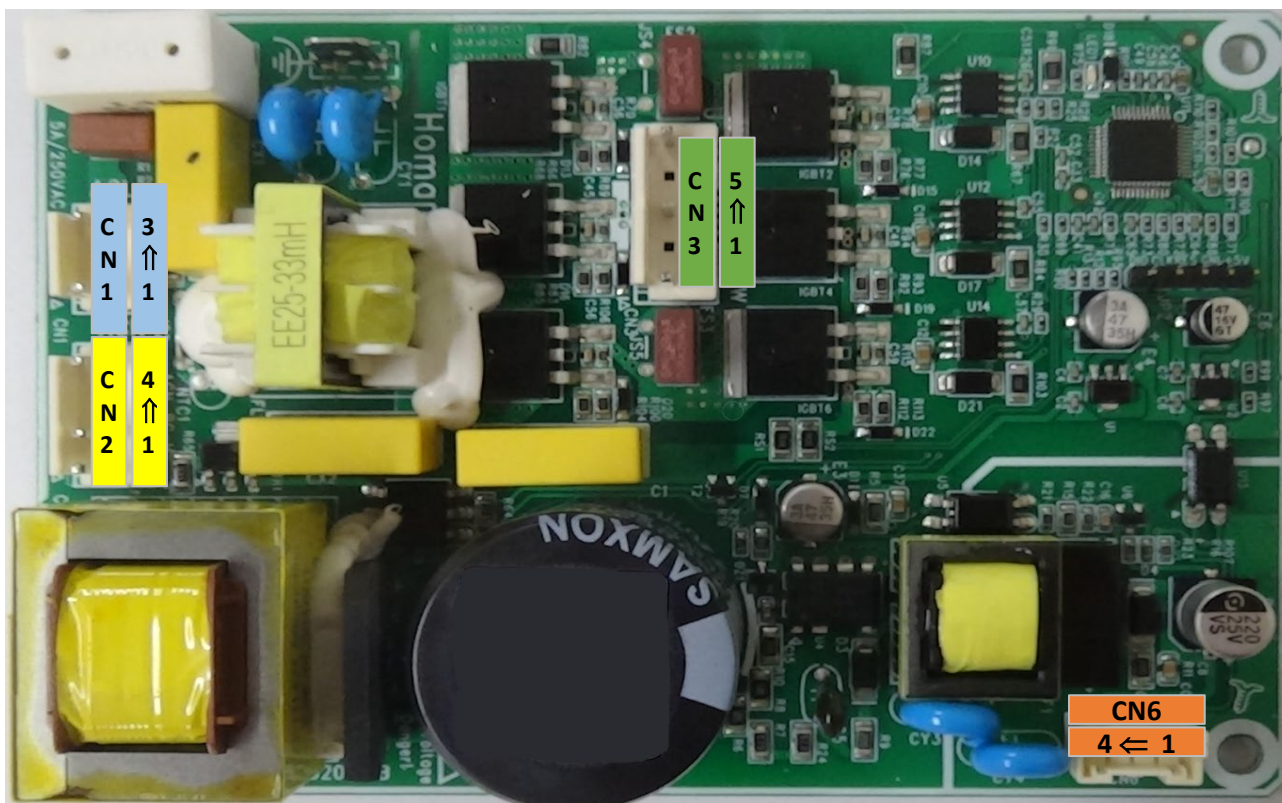

CN1	1	ACN	Neutral	CN3	1	W.	Compresor
	2	-	-		2	-	-
	3	LCD	Fase		3	v	Compresor
CN2	1	BC-H	-		4	-	-
	2	NTC1	Sonda de temperatura		5	tu	Compresor
	3	-	-	CN6	1	COMU	Mostrar
	4	norte	Neutral		2	Tierra	-
			3		NA DEL	-	
			4		+12V	Mostrar	


*La solution assistance*



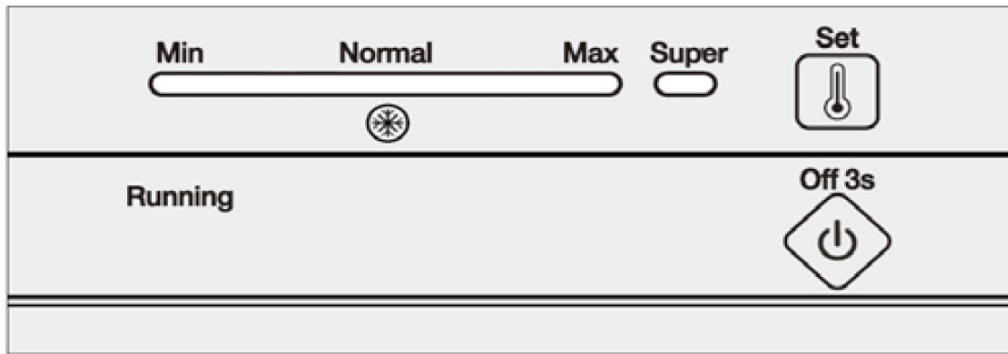


CÓDIGO DE ERRO (piscando)	DESCRIÇÃO
	Falha no sensor de temperatura

Valores da sonda de temperatura							
T( )	R(kΩ)	T( )	R(kΩ)	T( )	R(kΩ)	T( )	R(kΩ)
-30	33,81	-18	16,90	2	5,87	8	4,37
-28	30,01	-16	15,15	3	5,59	10	3,97
-26	26,68	-10	10,92	4	5,32	15	3,14
-24	23,75	-5	8,39	5	5,06	20	2,50
-22	21,18	0	6,50	6	4,82	25	2,01
-20	18,90	1	6,18	7	4,59	30	1,62

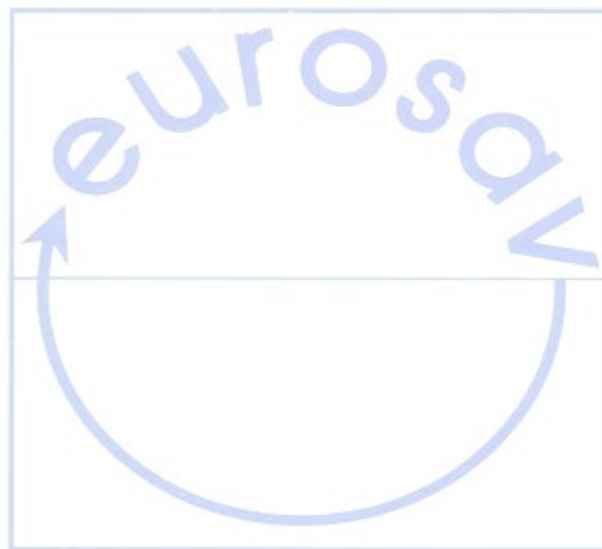


*La solution assistance*



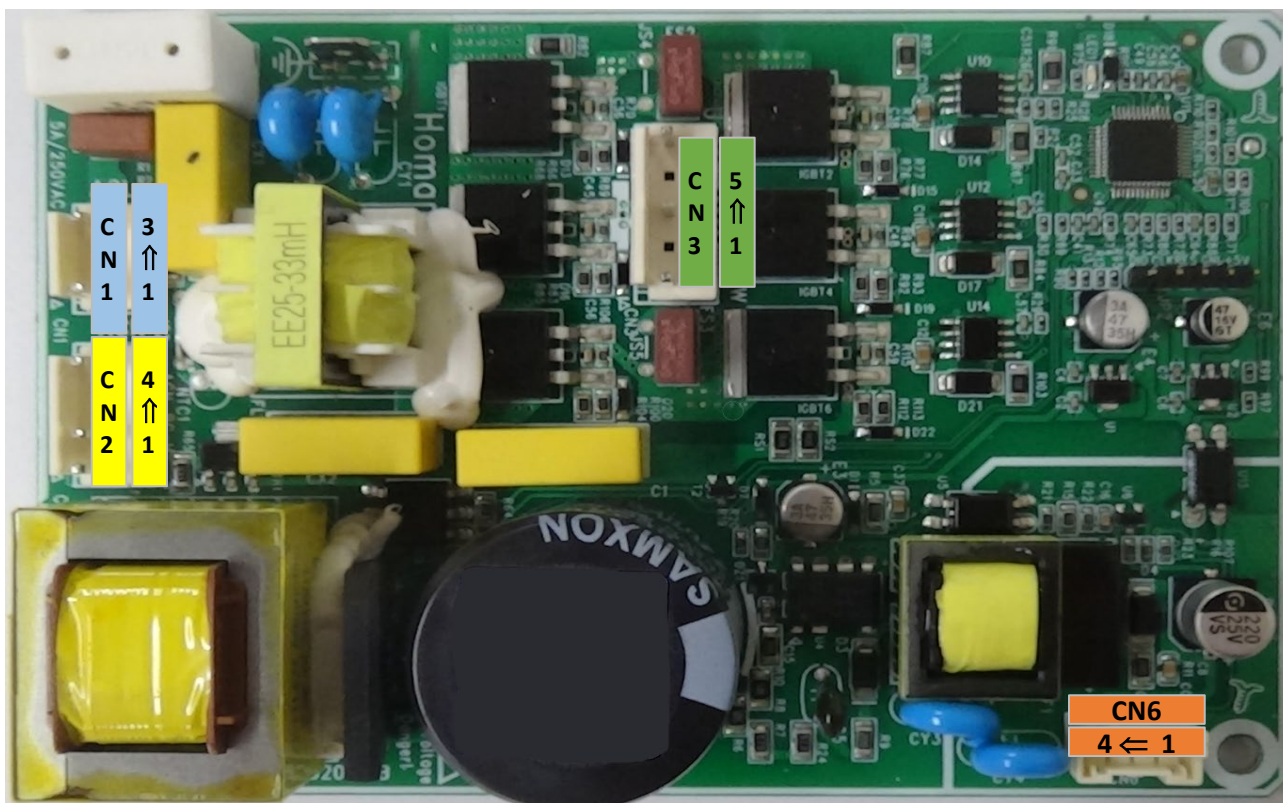


CN1	1	ACN	Neutro	CN3	1	C	Compressor
	2	-	-		2	-	-
	3	LCD	Fase		3	V	Compressor
CN2	1	BC-H	-		4	-	-
	2	NTC1	Sonda de temperatura		5	voçê	Compressor
	3	-	-	CN6	1	COMU	Mostrar
4	N	Neutro	2		GND	-	
			3		NC	-	
			4		+12V	Mostrar	

*La solution assistance*

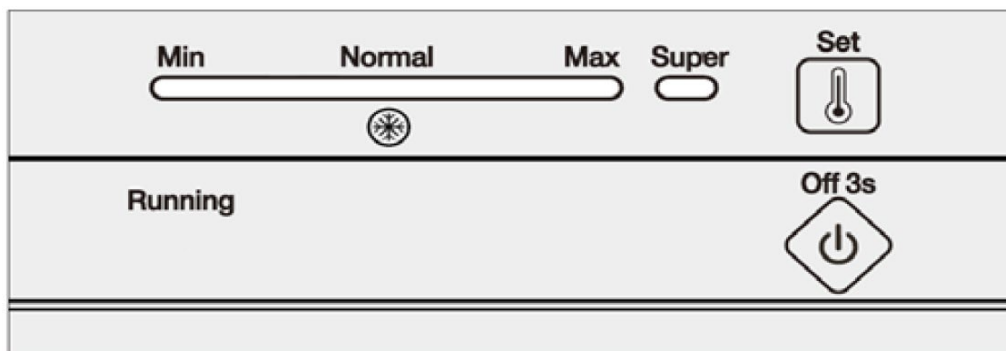


KOD BŁĘDU (miga)	OPIS
	Błąd czujnika temperatury

Wartości czujnika temperatury							
T( )	R(kΩ)	T( )	R(kΩ)	T( )	R(kΩ)	T( )	R(kΩ)
-30	33,81	-18	16,90	2	5,87	8	4,37
-28	30,01	-16	15,15	3	5,59	10	3,97
-26	26,68	-10	10,92	4	5,32	15	3,14
-24	23,75	-5	8,39	5	5,06	20	2,50
-22	21,18	0	6,50	6	4,82	25	2,01
-20	18,90	1	6,18	7	4,59	30	1,62

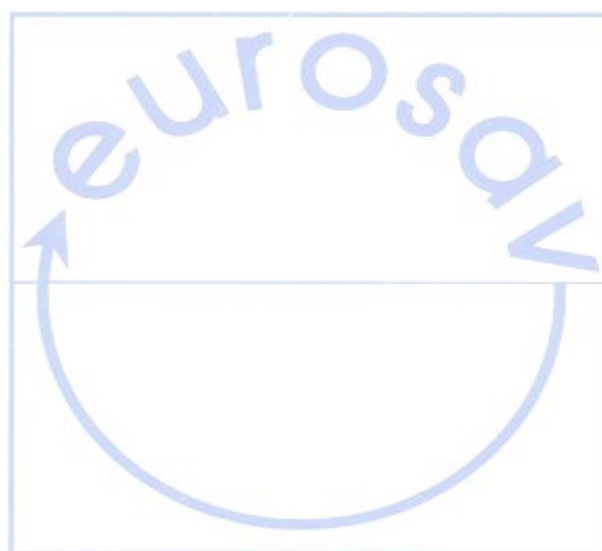


*La solution assistance*

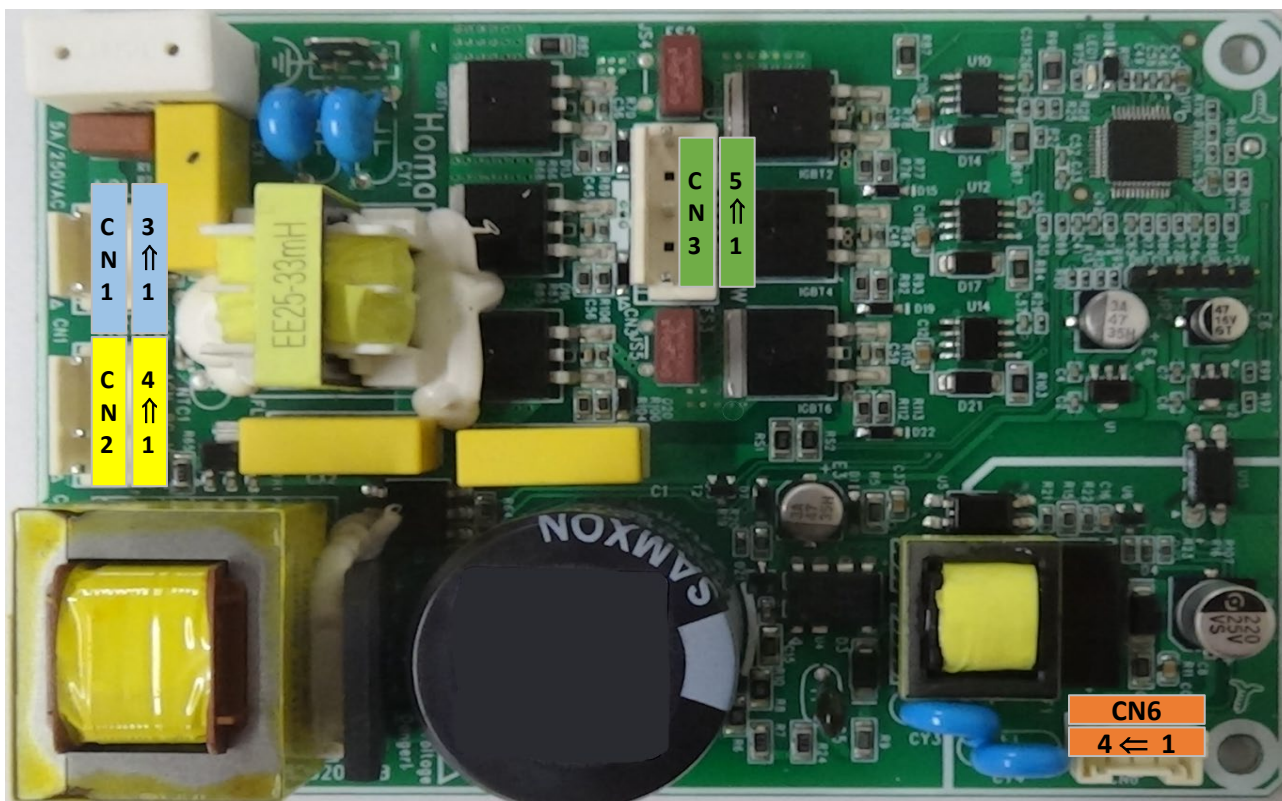

CN1	1	ACN	Neutralny	CN3	1	W	Kompresor
	2	-	-		2	-	-
	3	LCD	Faza		3	v	Kompresor
CN2	1	BC-H	-	4	-	-	
	2	NTC1	Sonda temperatury	5	ty	Kompresor	
	3	-	-	CN6	1	COMU	Wyświetlacz
	4	N	Neutralny		2	GND	-
				3	NC	-	
				4	+12V	Wyświetlacz	


*La solution assistance*



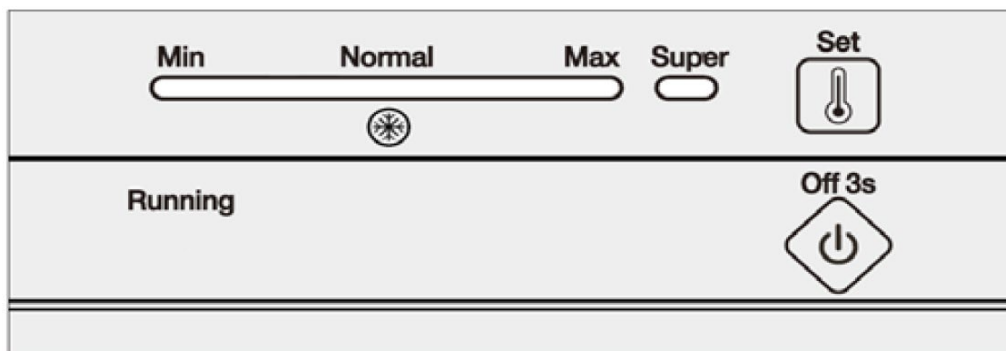


HIBAKÓD (villog)	LEÍRÁS
	Hőmérséklet érzékelő hiba

Hőmérséklet-szonda értékek							
T( )	R(kΩ)	T( )	R(kΩ)	T( )	R(kΩ)	T( )	R(kΩ)
-30	33,81	-18	16,90	2	5,87	8	4,37
-28	30,01	-16	15,15	3	5,59	10	3,97
-26	26,68	-10	10,92	4	5,32	15	3,14
-24	23,75	-5	8,39	5	5,06	20	2,50
-22	21,18	0	6,50	6	4,82	25	2,01
-20	18,90	1	6,18	7	4,59	30	1,62

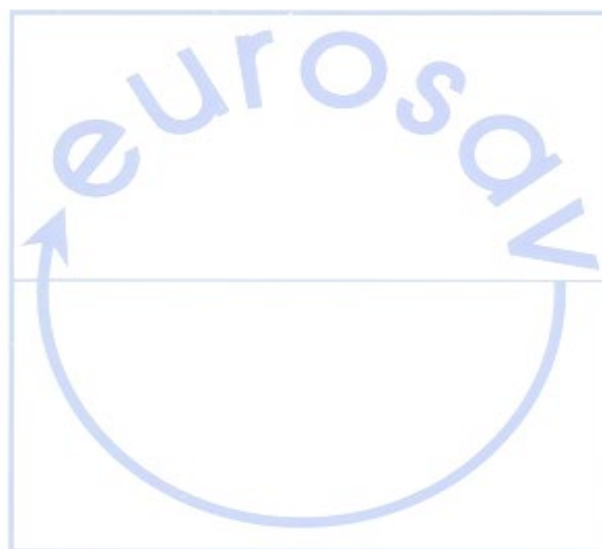


*La solution assistance*



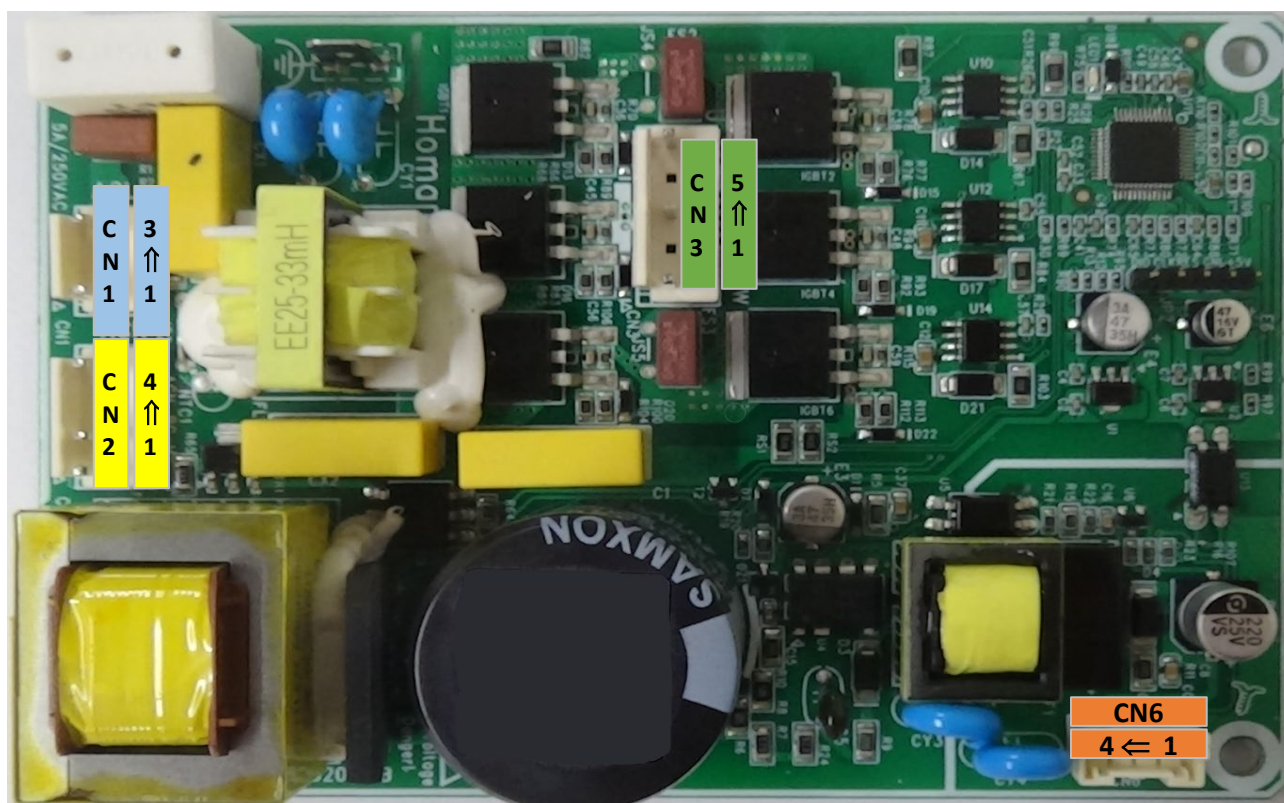


CN1	1	ACN	Semleges	CN3	1	W	Kompresszor
	2	-	-		2	-	-
	3	LCD	Fázis		3	V	Kompresszor
CN2	1	BC-H	-		4	-	-
	2	NTC1	Hőmérséklet szonda		5	u	Kompresszor
	3	-	-	CN6	1	COMU	Kijelző
4	N	Semleges	2		GND	-	
			3		NC	-	
			4		+12V	Kijelző	

*La solution assistance*

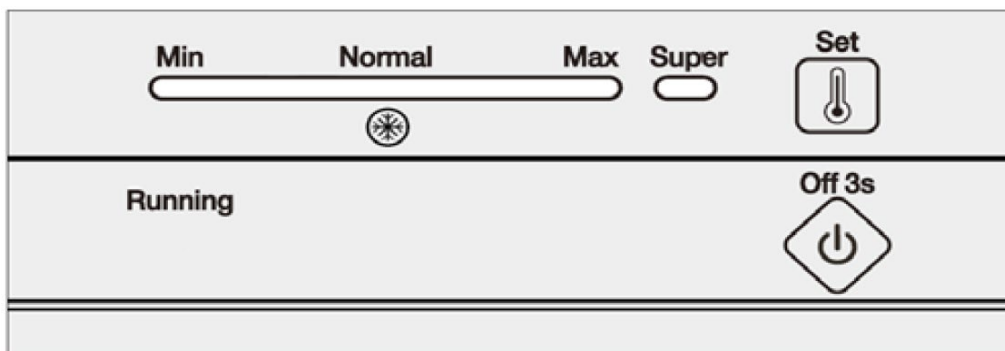


COD DE EROARE (pâlpâire)	DESCRIERE
	Eroare la senzorul de temperatură

Valorile sondei de temperatură							
T( )	R(kΩ)	T( )	R(kΩ)	T( )	R(kΩ)	T( )	R(kΩ)
-30	33,81	-18	16,90	2	5,87	8	4,37
-28	30,01	-16	15,15	3	5,59	10	3,97
-26	26,68	-10	10,92	4	5,32	15	3,14
-24	23,75	-5	8,39	5	5,06	20	2,50
-22	21,18	0	6,50	6	4,82	25	2,01
-20	18,90	1	6,18	7	4,59	30	1,62

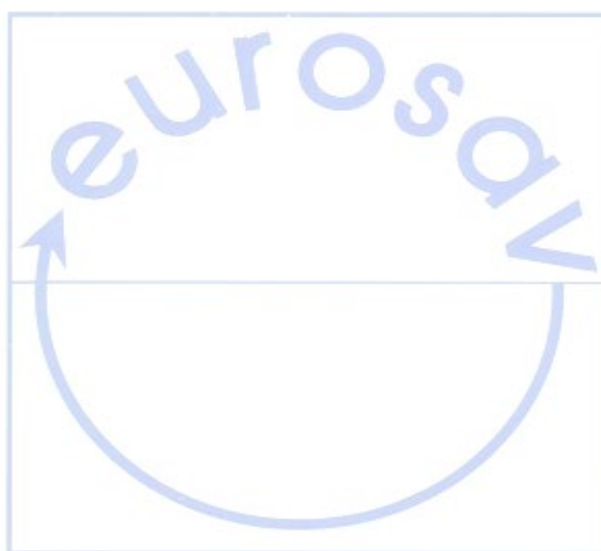


*La solution assistance*

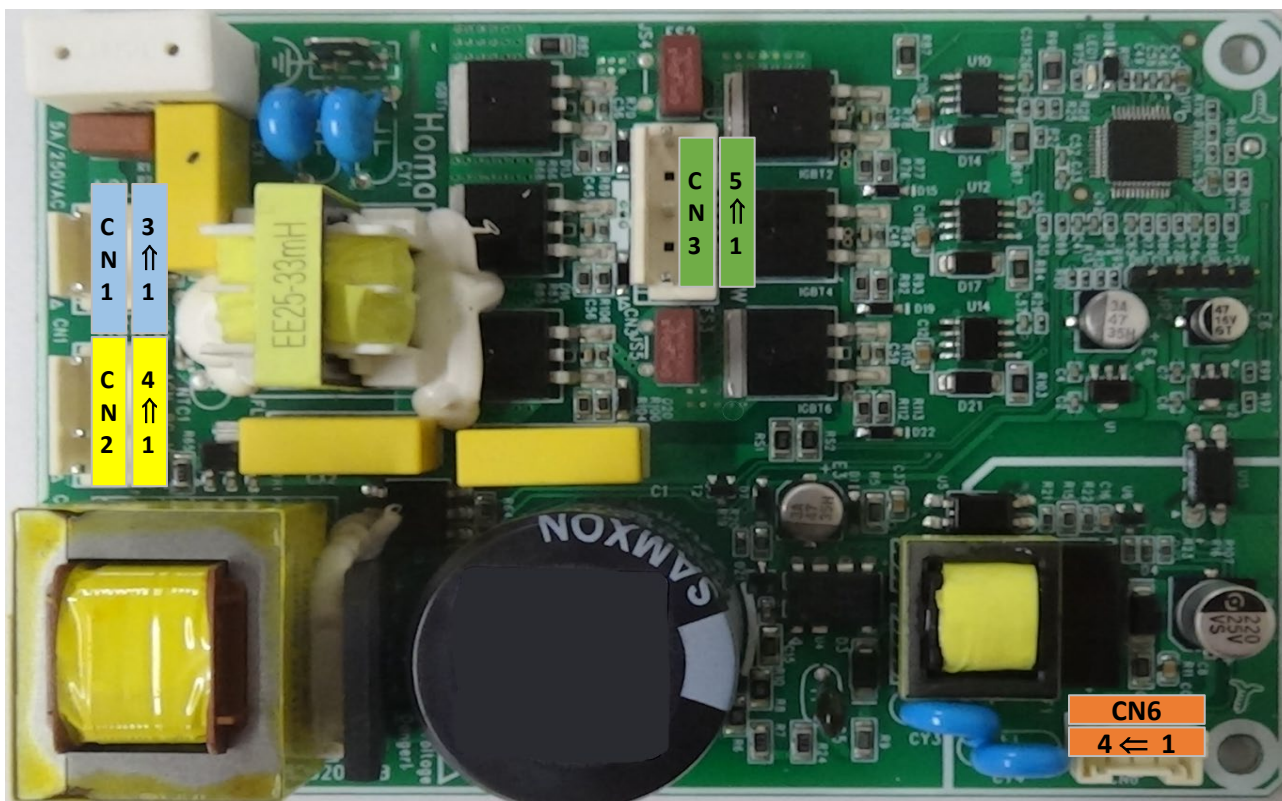

CN1	1	ACN	Neutru	CN3	1	W	Compresor
	2	-	-		2	-	-
	3	LCD	Fază		3	v	Compresor
CN2	1	BC-H	-		4	-	-
	2	NTC1	Sonda de temperatura		5	u	Compresor
	3	-	-	CN6	1	COMU	Afișa
	4	N	Neutru		2	GND	-
			3		NC	-	
			4		+12V	Afișa	


*La solution assistance*



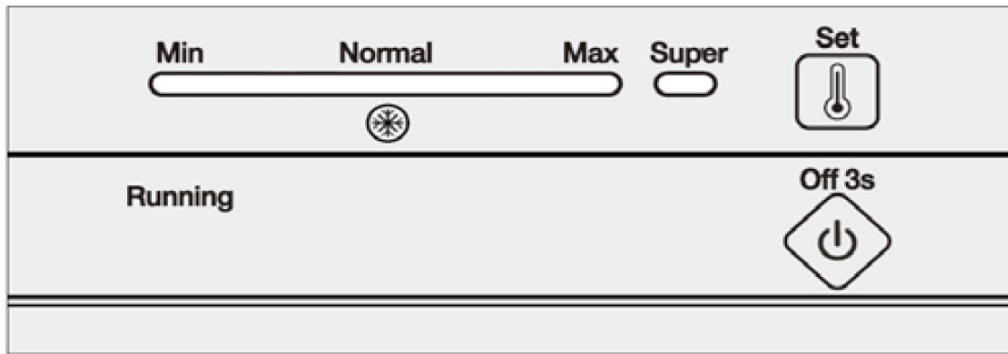


FEHLERCODE (Flackern)	BESCHREIBUNG
	Fehler am Temperatursensor

Temperaturfühlerwerte							
T( )	R(kΩ)	T( )	R(kΩ)	T( )	R(kΩ)	T( )	R(kΩ)
-30	33,81	-18	16,90	2	5,87	8	4,37
-28	30,01	-16	15,15	3	5,59	10	3,97
-26	26,68	-10	10,92	4	5,32	15	3,14
-24	23,75	-5	8,39	5	5,06	20	2,50
-22	21,18	0	6,50	6	4,82	25	2,01
-20	18,90	1	6,18	7	4,59	30	1,62

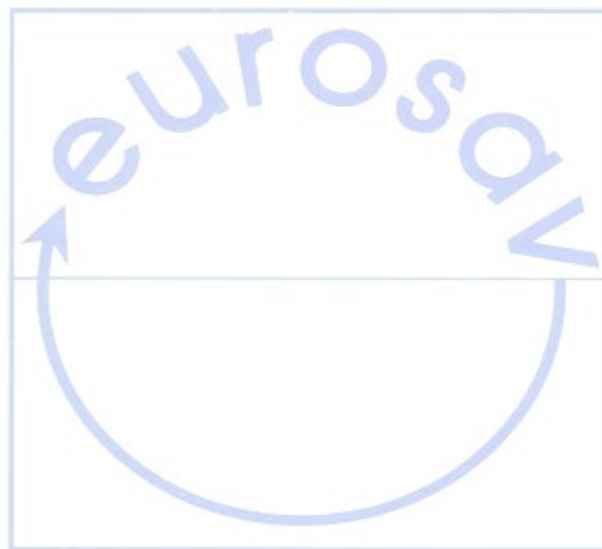

*La solution assistance*



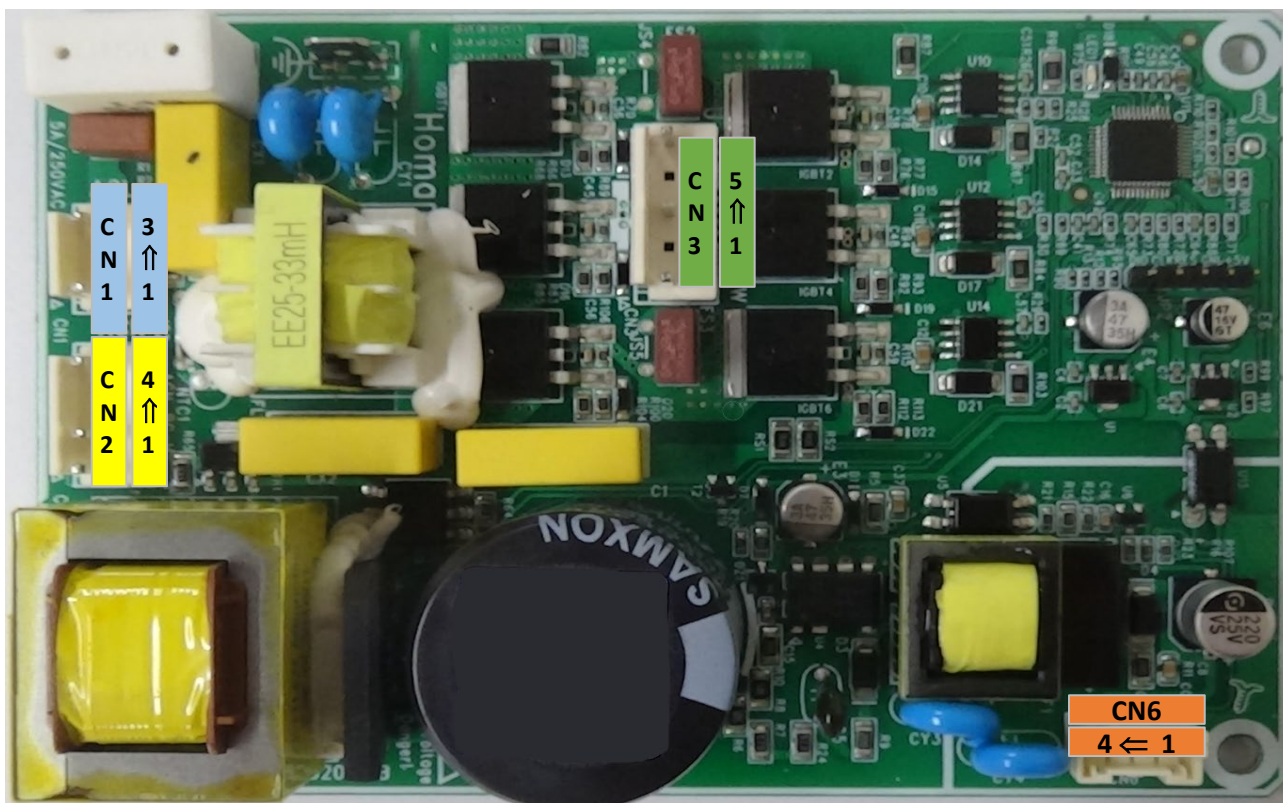

CN1	1	ACN	Neutral	CN3	1	W	Kompressor
	2	-	-		2	-	-
	3	LCD	Phase		3	v	Kompressor
CN2	1	BC-H	-		4	-	-
	2	NTC1	Temperaturfühler		5	u	Kompressor
	3	-	-	CN6	1	COMU	Anzeige
4	N	Neutral	2		GND	-	
			3		NC	-	
			4		+12V	Anzeige	

*La solution assistance*