



La solution assistance

ERROR CODE



La solution assistance



Français

Page de

2

à

2



English

Page

3

to

3



Español

página

4

a

4



Português

página

5

a

5



Polski

strona

6

do

6



Magyar

oldal

7

és

7



Română

pagina

8

și

8



Deutsch

Seite von

9

und


9

La solution assistance

| CODE ERREUR | Description |
|------------------------|-----------------------------|
| Clignotement éclairage | Défaut sonde de température |

| Valeurs sonde de température | | | | | | | |
|------------------------------|----------------|------|----------------|------|----------------|------|----------------|
| T() | R(k Ω) | T() | R(k Ω) | T() | R(k Ω) | T() | R(k Ω) |
| -30 | 33.81 | -20 | 18.9 | 0 | 6.495 | 5 | 5.06 |
| -28 | 30.01 | -18 | 16.9 | 1 | 6.175 | 6 | 4.818 |
| -26 | 26.68 | -16 | 15.12 | 2 | 5.873 | 8 | 4.372 |
| -24 | 23.76 | -10 | 10.92 | 3 | 5.587 | 10 | 3.972 |
| -22 | 21.18 | -5 | 8.392 | 4 | 5.315 | 15 | 3.141 |

La solution assistance

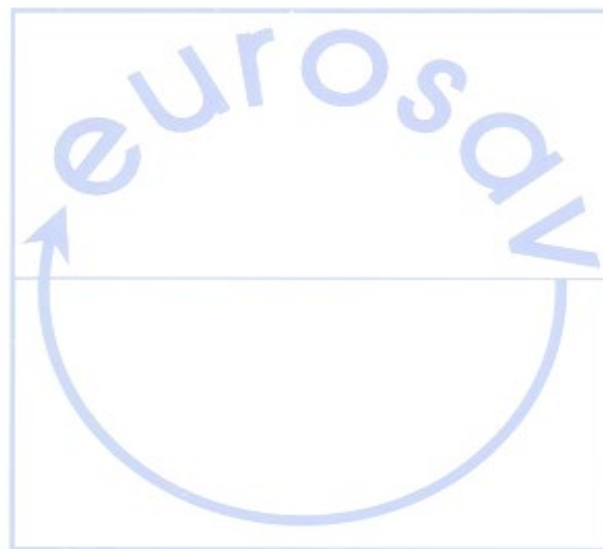


La solution assistance

| ERROR CODE | Description |
|-------------------|--------------------------|
| Flashing lighting | Temperature sensor fault |

| Temperature probe values | | | | | | | |
|--------------------------|-------|------|-------|------|-------|------|-------|
| T() | R(kΩ) | T() | R(kΩ) | T() | R(kΩ) | T() | R(kΩ) |
| -30 | 33.81 | -20 | 18.9 | 0 | 6,495 | 5 | 5.06 |
| -28 | 30.01 | -18 | 16.9 | 1 | 6.175 | 6 | 4,818 |
| -26 | 26.68 | -16 | 15.12 | 2 | 5,873 | 8 | 4.372 |
| -24 | 23.76 | -10 | 10.92 | 3 | 5,587 | 10 | 3,972 |
| -22 | 21.18 | -5 | 8,392 | 4 | 5.315 | 15 | 3.141 |

La solution assistance

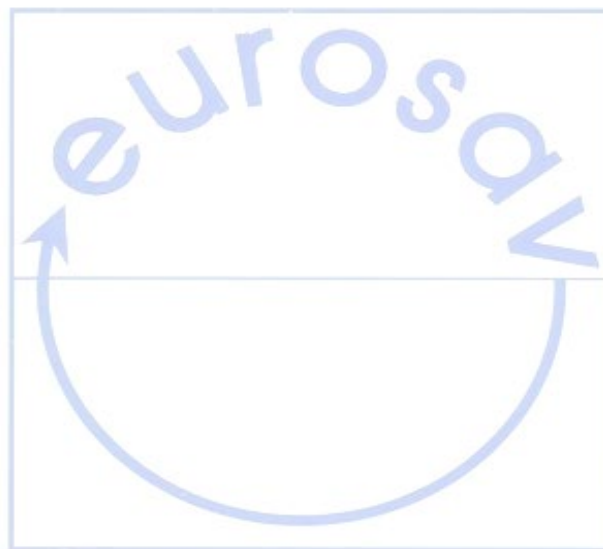


La solution assistance

| CÓDIGO DE ERROR | Descripción |
|--------------------------|---------------------------------|
| iluminación intermitente | Fallo del sensor de temperatura |

| Valores de la sonda de temperatura | | | | | | | |
|------------------------------------|-------|------|-------|------|-------|------|-------|
| T() | R(kΩ) | T() | R(kΩ) | T() | R(kΩ) | T() | R(kΩ) |
| -30 | 33,81 | -20 | 18.9 | 0 | 6.495 | 5 | 5.06 |
| -28 | 30.01 | -18 | 16.9 | 1 | 6.175 | 6 | 4.818 |
| -26 | 26,68 | -16 | 15.12 | 2 | 5.873 | 8 | 4.372 |
| -24 | 23,76 | -10 | 10.92 | 3 | 5.587 | 10 | 3.972 |
| -22 | 21.18 | -5 | 8.392 | 4 | 5.315 | 15 | 3.141 |

La solution assistance

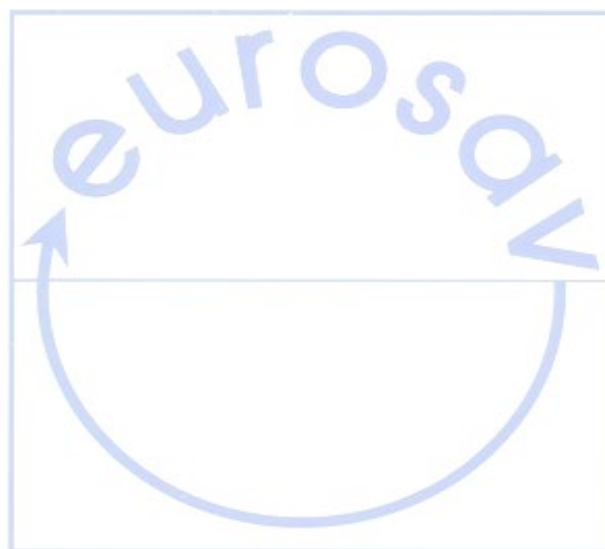


La solution assistance

| ERRO DE CÓDIGO | Descrição |
|-------------------------|--------------------------------|
| Iluminação intermitente | Falha no sensor de temperatura |

| Valores da sonda de temperatura | | | | | | | |
|---------------------------------|-------|------|-------|------|-------|------|-------|
| T() | R(kΩ) | T() | R(kΩ) | T() | R(kΩ) | T() | R(kΩ) |
| -30 | 33,81 | -20 | 18,9 | 0 | 6.495 | 5 | 5.06 |
| -28 | 30.01 | -18 | 16,9 | 1 | 6.175 | 6 | 4.818 |
| -26 | 26,68 | -16 | 15.12 | 2 | 5.873 | 8 | 4.372 |
| -24 | 23,76 | -10 | 10,92 | 3 | 5.587 | 10 | 3.972 |
| -22 | 21.18 | -5 | 8.392 | 4 | 5.315 | 15 | 3.141 |

La solution assistance

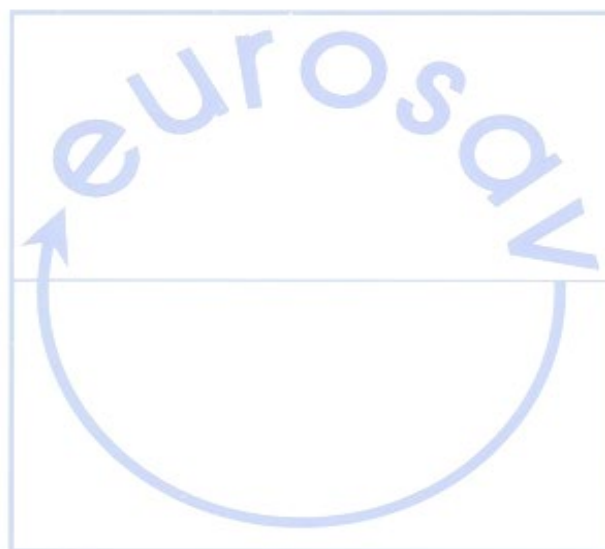

La solution assistance

| KOD BŁĘDU | Opis |
|----------------------|---------------------------|
| Migające oświetlenie | Błąd czujnika temperatury |

| Wartości czujnika temperatury | | | | | | | |
|-------------------------------|-------|------|-------|------|-------|------|-------|
| T() | R(kΩ) | T() | R(kΩ) | T() | R(kΩ) | T() | R(kΩ) |
| -30 | 33,81 | -20 | 18.9 | 0 | 6495 | 5 | 5.06 |
| -28 | 30.01 | -18 | 16.9 | 1 | 6.175 | 6 | 4818 |
| -26 | 26,68 | -16 | 15.12 | 2 | 5873 | 8 | 4.372 |
| -24 | 23,76 | -10 | 10,92 | 3 | 5587 | 10 | 3972 |
| -22 | 21.18 | -5 | 8392 | 4 | 5.315 | 15 | 3.141 |

La solution assistance




La solution assistance

| HIBAKÓD | Leírás |
|-------------------|---------------------------|
| Villogó világítás | Hőmérséklet érzékelő hiba |

| Hőmérséklet-szonda értékek | | | | | | | |
|----------------------------|-------|------|-------|------|-------|------|-------|
| T() | R(kΩ) | T() | R(kΩ) | T() | R(kΩ) | T() | R(kΩ) |
| -30 | 33.81 | -20 | 18.9 | 0 | 6,495 | 5 | 5.06 |
| -28 | 30.01 | -18 | 16.9 | 1 | 6.175 | 6 | 4,818 |
| -26 | 26.68 | -16 | 15.12 | 2 | 5,873 | 8 | 4.372 |
| -24 | 23.76 | -10 | 10.92 | 3 | 5,587 | 10 | 3,972 |
| -22 | 21.18 | -5 | 8,392 | 4 | 5.315 | 15 | 3.141 |

La solution assistance

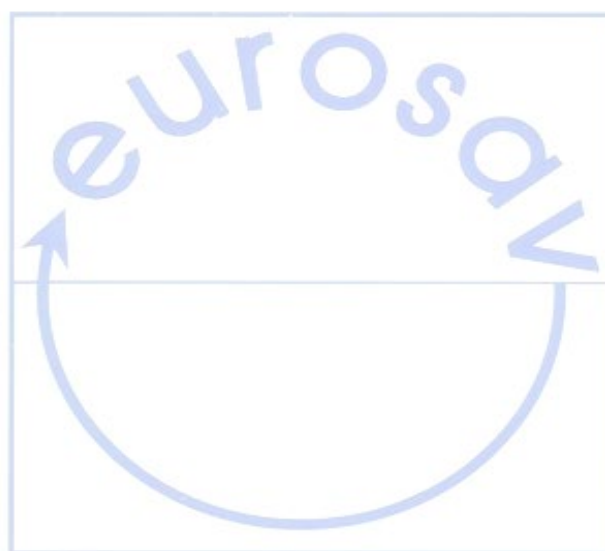


La solution assistance

| COD DE EROARE | Descriere |
|------------------------|-----------------------------------|
| Iluminare intermitentă | Eroare la senzorul de temperatură |

| Valorile sondei de temperatură | | | | | | | |
|--------------------------------|----------------|------|----------------|------|----------------|------|----------------|
| T() | R(k Ω) | T() | R(k Ω) | T() | R(k Ω) | T() | R(k Ω) |
| -30 | 33,81 | -20 | 18.9 | 0 | 6.495 | 5 | 5.06 |
| -28 | 30.01 | -18 | 16.9 | 1 | 6.175 | 6 | 4.818 |
| -26 | 26.68 | -16 | 15.12 | 2 | 5.873 | 8 | 4.372 |
| -24 | 23.76 | -10 | 10.92 | 3 | 5.587 | 10 | 3.972 |
| -22 | 21.18 | -5 | 8.392 | 4 | 5.315 | 15 | 3.141 |

La solution assistance

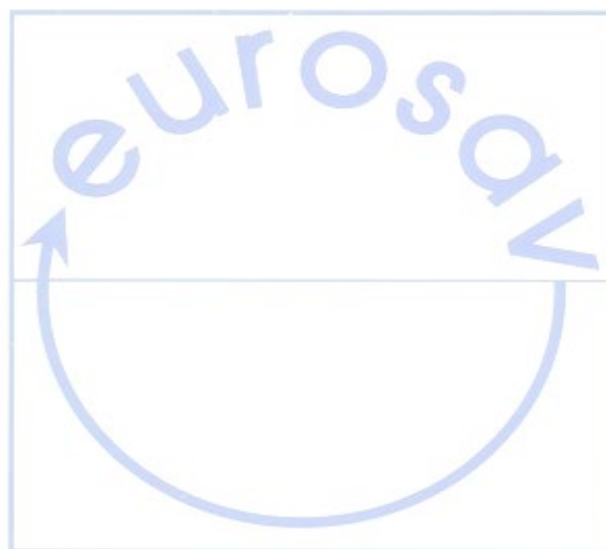


La solution assistance

| FEHLERCODE | Beschreibung |
|-----------------------|----------------------------|
| Blinkende Beleuchtung | Fehler am Temperatursensor |

| Temperaturfühlerwerte | | | | | | | |
|-----------------------|----------------|------|----------------|------|----------------|------|----------------|
| T() | R(k Ω) | T() | R(k Ω) | T() | R(k Ω) | T() | R(k Ω) |
| -30 | 33,81 | -20 | 18.9 | 0 | 6.495 | 5 | 5.06 |
| -28 | 30.01 | -18 | 16.9 | 1 | 6.175 | 6 | 4.818 |
| -26 | 26.68 | -16 | 15.12 | 2 | 5.873 | 8 | 4.372 |
| -24 | 23.76 | -10 | 10.92 | 3 | 5.587 | 10 | 3.972 |
| -22 | 21.18 | -5 | 8.392 | 4 | 5.315 | 15 | 3.141 |

La solution assistance

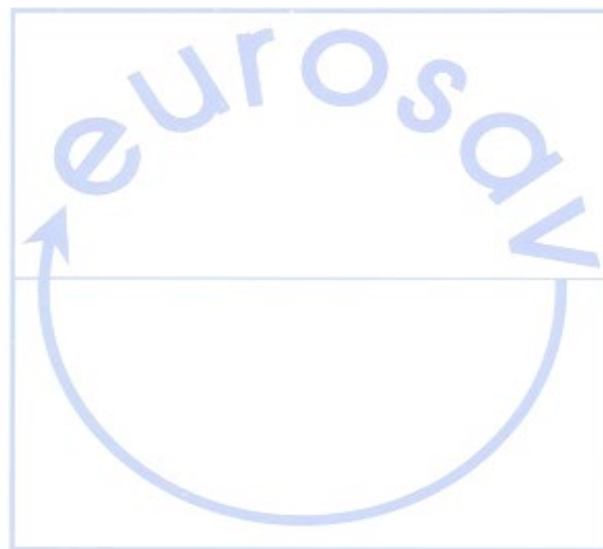

La solution assistance